SC-CE3F | Cam action concealed door closer





SC-CE3F | Cam action concealed door closer

Maintain the style of your door, fit UNION'S SC-CE3F high efficiency concealed closer, offering all the functionality of a power size 3 closer, with the discretion of being hidden from view.

The exceptionally small profile of this door closer means it is quicker to install.

The cam action mechanism helps to meet the requirements of BS8300. Combining this with the CE mark and fire testing for timber doors, the SC-CE3F is ideal for commercial applications.



- Small profile for quick fitting
- Tested to BS EN 1154
- BS EN 1634 Part 1 : 2000 assessed for use on 30/60 minute timber fire doors[†]
- Fixed power size 3
- Helps to meet the requirements of BS8300
- Hold open option also available (not suitable for fire doors)
- Built-in pressure relief value protects against abuse
- Stable hydraulic fluid offers low sensitivity to temperature fluctuation
- Needle bearings giving optimal performance and efficiency
- 10 year guarantee










Feature	SC-CE3F
CE	BS EN 1154
Power size	3
Maximum door width	950mm
Maximum door weight	60kg
Action	Cam action
Fitting	Concealed
Suitable for timber fire doors	FD30/FD60 [†]
Suitable for steel fire doors	No
Power adjustment	No
Adjustable closing speed	Yes
Adjustable latching speed	Yes
Backcheck	No
Delayed action	No
Angle of opening	120°
Non-handed	Yes
Finish	Silver
Guarantee	10 years

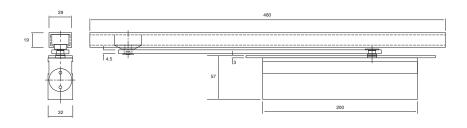

Ideal applications

University residential blocks, high end residential buildings, commercial buildings requiring high level aesthetics with a hidden closer or in areas where vandalism may be a concern.

Accessories

- A100 mechanical hold-open (not suitable for fire door)
- A110 guide rail dampener
- SC-CE3F-30-IK Intumescent pack († required for FD30 fire doors)
- SC-CE3F-60-IK Intumescent pack († required for FD60 fire doors)



For further information please contact us on 0845 223 2124 or visit www.uniononline.co.uk/scce3f